


# Congratulations!

## Now It's Time To Get Ready.

15' of Extra Electrical Wire in Liquid Tight at this Corner Or

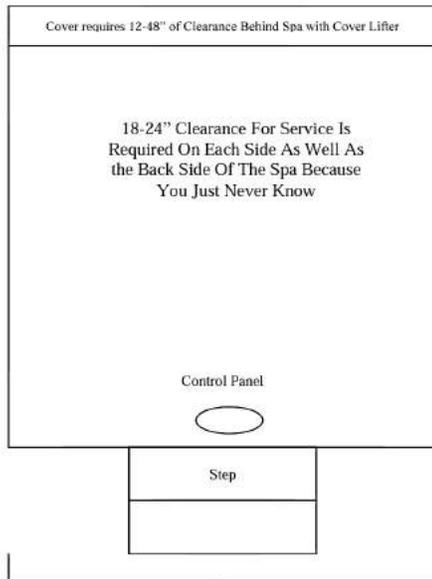

15' of Extra Electrical Wire in Liquid Tight at this Corner Or

8' of Extra Electrical Wire in Liquid Tight at this Corner Or

8' of Extra Electrical Wire in Liquid Tight at this Corner



Time to get ready for your new hot tub! The first thing to do is run your electrical. Next up will be a hard reasonably level surface. Here are some things to remember when starting your project:

- 3/4" flexible conduit is the perfect size for a clean install. This will be stubbed up at one corner (not under) the spa. Please make sure it is long enough and already contains the proper gauge of wire
- Make sure your electrical is long enough. It's better to be too long than too short. We don't carry electrical supplies.
- Service access is a must! If you are building around your hot tub, you **MUST** have access to all 4 sides. This means trap doors or removable panels. This also means deck supports that are removed with the panels. If we can't access it, we can't fix it.

### Aqua Paradise

Carlsbad (760) 431-7727  
6990 El Camino Real

San Diego (858) 675-7727  
11305 Rancho Bernardo Rd

Info@ [AquaParadiseCA.com](mailto:Info@AquaParadiseCA.com)



Access is something else very important. The majority of hot tubs are delivered on their side on a big dolly. We can go over any surface but we also have some limitations. Here are some more things to remember about delivery of your new Jacuzzi.

#### What to expect on delivery day:

**Step 1.** Spa is delivered within a predetermined 3 hour window and set in place by the delivery crew. Accessories and care products will come separately.

**Step 2.** Your setup is automatically scheduled to start within a 2 hour window after your delivery window. This person will be bringing the remainder of your accessory items

**Step 3.** Setup and orientation will take 2-3 hours. If for some reason you are not ready for setup on delivery day please let us know at the time your delivery is scheduled.

**Step 4.** Wait for heat and enjoy!

- We normally deliver a hot tub on its side so that means we need the height of the spa plus at least 1". For Jacuzzi brand that means anywhere from 33" to 47" in width for delivery access to the site.
- We also need to consider overhead clearance. In other words we need the width of the spa plus 2". In other words, a Jacuzzi brand spa will need anywhere from 68" to 96" of over head clearance depending on model.
- 4 steps is about the maximum we can go up with a hot tub. If you have more than that then you may need additional man power for delivery which is an additional charge. Same rules apply for extremely steep inclines.
- Not everybody has access all the way to where they want their hot tub. At this point, a crane is going to be necessary. It sounds scarier than it really is but a crane delivery is usually very simple and straight forward. Crane costs start at \$350 and up but rarely exceed \$2000.
- Every once and awhile a forklift is used for delivery. In this instance, a forklift rental usually runs between \$300 and \$500.

**Referrals: Electrician - Nick Melendez Volt Electric (760) 822-9743, Deck Construction - Matt Nelson Nelsonbuilt (619) 302-0633, Concrete - Mike David Masonry (760) 801-3384**